(11) EP 1 181 901 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

27.02.2002 Bulletin 2002/09

(51) Int CI.7: A61F 2/06

(21) Application number: 01122700.6

(22) Date of filing: 26.07.1995

(84) Designated Contracting States:

AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL
PT SE

(30) Priority: 28.07.1994 US 282181 31.05.1995 US 457354

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC: 98101294.1 / 0 846 450 95929314.3 / 0 762 856

(71) Applicant: Medinol Ltd. Tel Aviv 61581 (IL) (72) Inventors:

- Israel, Henry M.
 Bnei Brak (IL)
- Pinchasik, Gregory 46424 Herzelia (IL)
- (74) Representative: Altenburg, Udo, Dipl.-Phys. et al Patent- und Rechtsanwälte Bardehle -Pagenberg - Dost - Altenburg - Gelssier -Isenbruck, Galileipiatz 1 81679 München (DE)


Remarks:

This application was filed on 01 - 10 - 2001 as a divisional application to the application mentioned under INID code 62.

(54) A flexible expandable stent

(57) There is disclosed a stent for implanting in the body. The stent is formed of a tube having a patterned shape which has first and second meander patterns having axes extending in first and second directions. The first meander patterns can be formed into even and odd first meander patterns. The even and odd first meander patterns.

ander patterns are 180° out of phase with each other and the odd patterns occur between every two even patterns. The second meander patterns are intertwined with the first meander patterns. The first and second directions can be orthogonal to each other. The second meander patterns can also be formed of even and odd patterns.

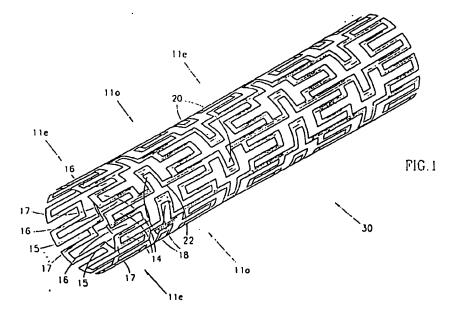

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to stents for implanting into a living body.

1

BACKGROUND OF THE INVENTION

[0002] Various stents are known in the art wherein, for the present application, the term "stent" indicates a device, made of bcdy-compatible material, which is utilized to widen a blood vessel, or other orifice in the body, and to maintain the resultant size of the lumen. Typically, the stent is delivered to the desired location in the body with an inflatable balloon and, when the balloon is inflated, the stent expands, thereby widening the orifice. Other mechanical devices which cause expansion of the stent are also utilized.

[0003] Examplary parents in the field of stents formed of wire are: U.S. 5,019,090 to Pinchuk, U.S. 5,161,547 to Tower, U.S. 4,950,227 to Savin, et al., U.S. 5,314,472 to Fontaine, U.S. 4,886,062 and U.S. 4,969,458 to Wiktor and U.S. 4,856,516 to Hillstead. Stents formed of cut stock metal are described in: U.S. 4,733,665 to Palmaz, U.S. 4,762,128 to Rosenbluth, U.S. 5,102,417 to Palmaz and Schatz, U.S. 5,195,984 to Schatz and WO 91 FR013320 to Meadox.

[0004] The stents described in U.S. 5,102,417 to Palmaz and Schatz have expandable tubular grafts connected together with a flexible connector. The grafts are formed of a plurality of slots disposed parallel to the longitudinal axis of the tube. The flexible connectors are helical connectors. Since the tubular grafts are relatively rigid, the flexible connectors are needed so that the stents can bend when being fed through a curved blood vessel. When the stents of U.S. 5,102,417 expand, the grafts expand radially and, consequently, shrink longitudinally. However, at the same time, the helical connectors twist. The twisting motion is most probably harmful to the blood vessel.

[0005] U.S. 5,195,934 to Schatz describes a similar stent but with one straight connector, parallel to the longitudinal axis of the tubular grafts, between tubular grafts. The straight member removes the twisting motion; however, it is not a very strong connector.

SUMMARY OF THE PRESENT INVENTION

[0006] It is therefore an object of the present invention to provide a flexible stent which minimally shrinks, in the longitudinal direction, during expansion.

[0007] The stent of the present invention is formed of a tube having a patterned shape which has first and second meander patterns having axes extending in first and second directions wherein the second meander patterns are intertwined with the first meander patterns. The first and second directions can be orthogonal to

each other.

[0008] In accordance with one embodiment of the present invention, the first meander patterns are formed into even and odd first meander patterns. The even and odd first neander patterns are 180° out of phase with each other and the odd patterns occur between every two even patterns. The second meander patterns can also be formed of even and odd patterns.

[0009] Additionally, in accordance with a preferred embodiment of the present invention, the second meander patterns have two loops per period and the even and odd first meander patterns are connected on first and second sides, respectively, of each loop of the second meander patterns.

[0010] Alternatively or in addition, the second meander patterns are formed of even and odd second meander patterns. In this embodiment, the even and odd first meander patterns have loops and the even and odd second meander patterns are connected to the even and odd first meander patterns so as to leave one full loop between each pair of even and odd second meander patterns.

[0011] Moreover, in accordance with a preferred embodiment of the present invention, the first and second meander patterns are formed from flat metal. Alternatively, they can be cut from wire. Further, they can be imbedded or covered with any body-compatible material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the drawings in which:

Fig. 1 is an illustration of a patterned stent, constructed and operative in accordance with a first preferred embodiment of the present invention;

Fig. 2 is an illustration of the pattern of the scent of Fig. 1;

Fig. 3 is an illustration of the stent of Fig. 1 in a bent position;

Fig. 4 is an illustration of the stent of Fig. 1 in an expanded format;

Figs. 5A and 5B are illustrations of the changes in the patterns of the stent of Fig. 1 due to expansion; Fig. 6 is a schematic illustration of a second embodiment of the pattern for a stent;

Fig. 7 is an illustration of a third embodiment of the pattern for the stent; and

Fig. 8 is an illustration of the pattern of Fig. 7 in an expanded format.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0013] Reference is now made to Figs. 1 - 4 which illustrate a first embodiment of a stent, constructed and

operative in accordance with the principles of the present invention. Fig. 1 illustrates the stent in its non-expanded form, Fig. 2 illustrates the pattern of the stent, Fig. 3 illustrates it in a partially bent position and Fig. 4

illustrates it in an expanded form.

[0014] The stent of the present invention is a tube whose sides are formed into a plurality of each of two orthogonal meander patterns which patterns are intertwined with each other. The term "meander pattern" is taken herein to describe a periodic pattern about a center line and "orthogonal meander patterns" are patterns whose center lines are orthogonal to each other.

[0015] In the stent of Figs. 1 - 4, the two meander patterns are labeled 11 and 12 and they are most easily seen in Fig. 2. Meander pattern 11 is a vertical sinusoid having a vertical center line 9. Meander pattern 11 has two loops 14 and 16 per period wherein loops 14 open to the right while loops 16 open to the left. Loops 14 and 16 share common members 15 and 17, where member 17 connects from one loop 14 to its following loop 16 and member 15 connects from one loop 16 to its following loop 14.

[0016] Meander pattern 12 is an horizontal pattern having an horizontal center line 13. Meander pattern 12 also has loops, labeled 13 and 20, but between loops of a period is an extended straight section labeled 22. Loops 18 open downwards and loops 20 open upwards. Vertical meander pattern 11 is provided in odd and, even (o and e) versions which are 180° out of phase with each other. Thus, each left opening loop 16 of meander pattern 110 faces a right opening loop 14 of meander pattern 11e and a right opening loop 14 of meander pattern 110 faces a left opening loop 16 of meander pattern 11e. [0017] Horizontal meander pattern 12 is also provided in odd and even forms. The straight sections 22 of horizontal meander pattern 12e intersect with every third common member 17 of vertical meander pattern 11e. The straight sections 22 of horizontal meander pattern 120 intersect with every third common member 15 of vertical meander pattern 11e, beginning with the common member 15 two after an intersected common member 17. The result is a full loop 14 between meander patterns 12e and 120 and a full loop 16 between meander patterns 120 and 12e.

[0018] Returning to Fig. 1, the pattern of Fig. 2 is formed into a tube 30 of an easily deformable material, such as a metal. Due to the two meander patterns, the stent of Fig. 1, when attached over a catheter balloon, is flexible and can therefore be easily dragged through curved blood vessels. An example of the way in which the stent of Fig. 1 bends is illustrated in Fig. 3.

[0019] In Fig. 3, the stent begins to bend at the point marked A in the direction marked by arrow 40. As the stent begins to curve, the section marked I becomes the inside of the curve while the section marked O becomes the outside of the curve. The inside of the curve I is shortened vis-a-vis the outside of the curve 0.

[0020] During bending, the loops 14 - 20 to the right

of the point A change shape in order to compensate for the differences in length between the inside and outside curves. For example, loops 13i and 20i near the inside of the curve are closer together than loops 18_o and 20_o on the outside of the curve, which expand. Loops 14i and 16i near the inside I are compressed while the loops 14o and 16o closer to the outside O of the curve are expanded.

[0021] As can be seen, both meander patterns 11 and 12 are involved in the bending. Although not shown, it will be appreciated that the stent of Figs. 1 - 4 can bend in any direction and in more than one direction at any time.

[0022] Fig. 4 illustrates the stent of Fig. 1 in its expanded form. When the stent expands, both meander patterns 11 and 12 expand (i.e. all loops 14 - 20 open up). As can be seen, the expanded stent has two types of enclosed spaces, a large space 42 between meander patterns 120 and 12e and a small space 44 between meander patterns 12e and 120. As can also be seen, each large space 42 has two loops 14 on its left side and two loops 16 on its right side. The large spaces between vertical meander patterns 11e and 11o, which are labeled 42a, have loops 18 at their tops and bottoms while the large spaces between vertical meander patterns 11o and lie, which are labeled 42b, have loops 20 at their tops and bottoms. Similarly for small spaces 44a and 44b.

[0023] It is noted that, due to the orthogonal meander patterns 11 and 12, the stent of Fig. 1 does not significantly shrink during expansion. This is illustrated in detall in Figs. 5A and 5B' to which reference is now made. Fig. 5A illustrates the movement, during expansion, of one vertical meander pattern 11 and Fig. 5B illustrates the movement, during expansion, of one horizontal meander pattern 12. The original patterns are shown with solid lines and the expanded patterns are shown with dashed lines.

[0024] The vertical meander pattern 11 of Fig. 5A expands by widening its loops 14 and 16. As a result, the vertical meander pattern 11 grows vertically by an, amount 2*h₁, per loop. However, it also shrinks horizontally, by an amount 2*d₁. Similarly, the horizontal meander pattern 12 of Fig. 5B expands by widening its loops 18 and 20. As a result, the horizontal meander pattern 12 grows horizontally by an amount 2*d, per loop. However, it also shrinks vertically, by an amount h₂. Thus, the vertical growth of the vertical meander pattern 11 compensates, at least partially, for the vertical shrinkage of the horizontal meander pattern 12, and vice versa. It is noted that the end portions of any stent are only partially compensated and therefore, may shrink somewhat.

[0025] It will be appreciated that the two orthogonal meander patterns 11 and 12 and the compensation they provide to each other provides flexibility to the unexpanded stent of Fig. 1. However, when the stent is expanded, the changes in each of loops 14 and 16 provide

rigidity to the resultant stent and thus, enable the stent to maintain a blood vessel at a desired inner diameter. [0026] The stent of the present invention can be manufactured from flat metal which is etched into the pattern of Fig. 2. The etched metal is then bent to form the tube 30. Alternatively, the pattern of Fig. 2 can be manufactured from welded or twisted wire.

[0027] It will be appreciated that the stent of the present invention can be made from metal and/or wire. Additionally, it can be plated with a protective material, embedded with a medicine, and/or covered with a material which can fill in the spaces 42 and 44.

[0028] It will be appreciated that the present invention encompasses all stents manufactured with a pattern formed of two meander patterns, orthogonal or otherwise. Another exemplary pattern, also with orthogonal meander patterns, is provided herein wherein Fig. 6 is a schematic version and Fig. 7 is a more rounded version. Fig. 8 shows the pattern of Fig. 7 in an expanded format. The pattern of Figs. 6 and 7 is similar to that shown in Fig. 2 except that it has more horizontal meander patterns 12 and they are of one kind, rather than being even and odd as in Fig. 2.

[0029] As can be seen in both Figs. 6 and 7, there are two types of vertical meander patterns 11e and 11o 25 which are 180° out of phase with each other. The horizontal meander patterns 12 connect with every line 15 of vertical meander pattern 11e.

[0030] Fig. 8 illustrates the pattern of Fig. 7 in an expanded format. Since there are no even and odd horizontal meander patterns, in the expanded format of Fig. 8, there are no large and small spaces. Instead, all spaces are of the same size.

[0031] It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described hereinabove. Rather the scope of the present invention is defined by the claims which follow:

Claims


1. A stent comprising a mesh of adjacent, connected cells, each cell comprising:


> an even number of fixed length, alternating, first and second loops, connected together in a closed cell, each loop having at least two portions with an area of inflection there between, said first and second loops defining first and second angles whose bisecting lines are at angles one to another.


40


45


55

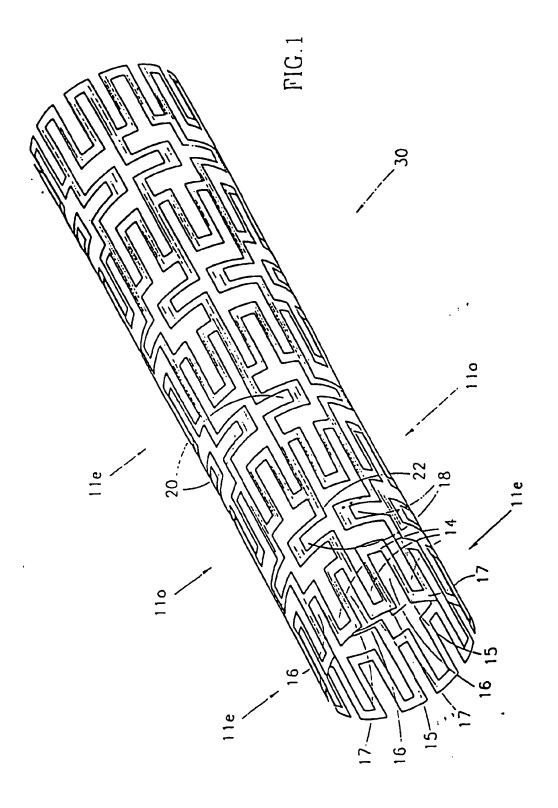


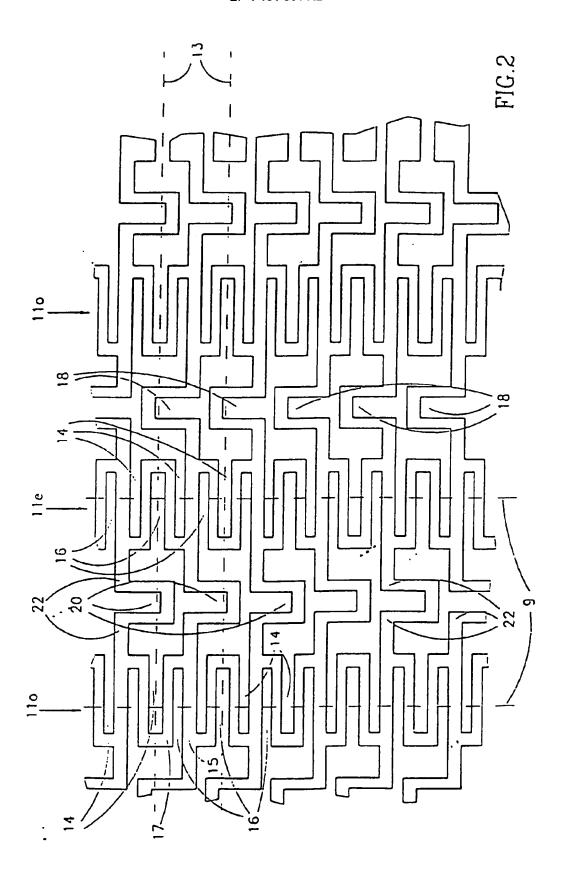


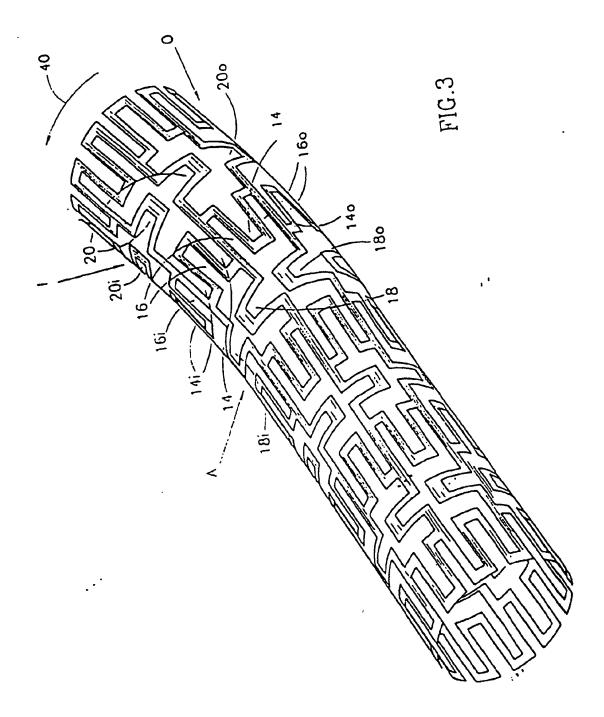


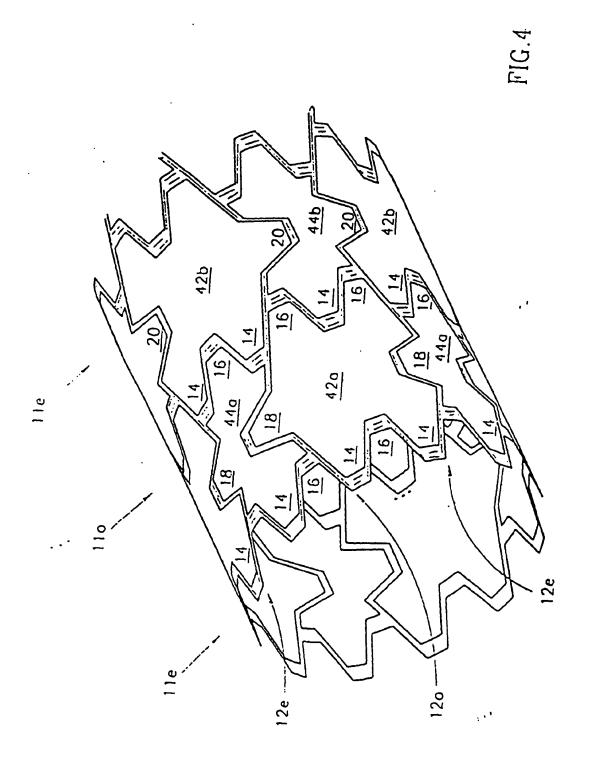

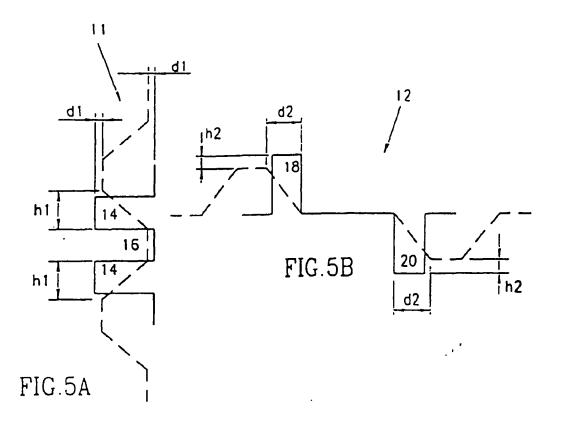

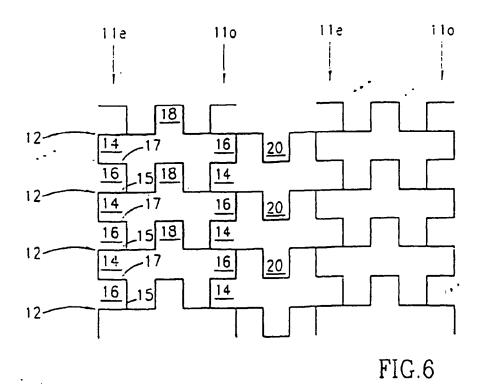

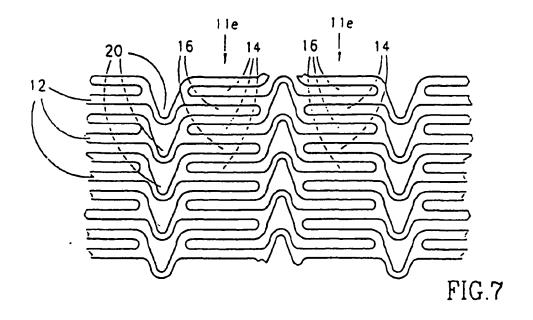

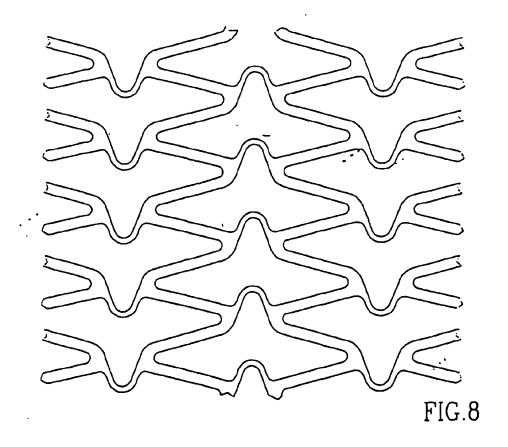

Europäisches Patentamt **European Patent Office**

(11)

EP 1 181 901 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3: 18.12.2002 Bulletin 2002/51 (51) Int CI.7: A61F 2/06

(43) Date of publication A2: 27.02.2002 Bulletin 2002/09

(21) Application number: 01122700.6

(22) Date of filing: 26.07.1995

(84) Designated Contracting States: AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL PT SE

(30) Priority: 28.07.1994 US 282181 31.05.1995 US 457354

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC: 98101294.1 / 0 846 450 95929314.3 / 0 762 856


(71) Applicant: Medinol Ltd. Tel Aviv 61581 (IL)

(72) Inventors:

- Israel, Henry M. Bnel Brak (IL)
- · Pinchasik, Gregory 46424 Herzelia (IL)
- (74) Representative: Altenburg, Udo, Dipl.-Phys. et al Patent- und Rechtsanwälte Bardehle - Pagenberg - Dost - Altenburg -Gelssier - Isenbruck, Galileiplatz 1 81679 München (DE)

A flexible expandable stent (54)

(57)There is disclosed a stent for implanting in the body. The stent is formed of a tube having a patterned shape which has first and second meander patterns having axes extending in first and second directions. The first meander patterns can be formed into even and odd first meander patterns. The even and odd first meander patterns are 180° out of phase with each other and the odd patterns occur between every two even patterns. The second meander patterns are intertwined with the first meander patterns. The first and second directions can be orthogonal to each other. The second meander patterns can also be formed of even and odd patterns.

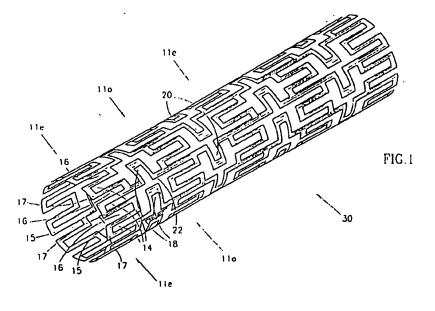



EUROPEAN SEARCH REPORT

Application Number EP 01 12 2700

ategory	Citation of document with In of relevant pass	dication, where appropriate, ages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.C.17)
1	EP 0 335 341 A (EXPAPARTNERSHIP) 4 Octob * the whole documen	ber 1989 (1989-10-04)	1	A61F2/06
4	SYSTEMS, INC.) 5 Mag	ANCED CARDIOVASCULAR y 1993 (1993-05-05) - column 6, line 49;	1	
			:	TECHNICAL FIELDS SEARCHED (Int.CI.7)
				A61F
				•
	The present search report has i	been drawn up for all claims		
	Place of search	Date of completion of the search		Examiner
	THE HAGUE	30 October 2002	Smi	th, C
X : par	ATEGORY OF CITED DOCUMENTS	T: theory or princip E: earlier patent of after the filling of	ocument, but publ ate	lished on, or
doc A : tec	ticularly relevant if combined with anot ument of the same catogory hnological beckground n-written disclosuro	::: document cited	for other reasons	

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 01 12 2700

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-10-2002

Patent document cited in search report		Publication date		Patent family member(s)		Publication date	
EP 335341	Α	04-10-1989	US	5102417	A	07-04-1992	
LI 333341		04 10 1303	AT	72954		15-03-1992	
			ΑÜ	633478		04-02-1993	
			AU	3174289		28-09-1989	
			CA	1330186		14-06-1994	
			DE	68900893		09-04-1992	
			EP	0335341		04-10-1989	
			ËS	2030230		16-10-1992	
			GR		T3	16-03-1993	
			JΡ	1299550		04-12-1989	
			JP	2933226		09-08-1999	
			KR	9711350		10-07-1997	
			KR	9711351		10-07-1997	
			KR	9711352		10-07-1997	
			ZA	8902287		27-12-1989	
EP 540290	Α	05-05-1993	CA	2079417		29-04-1993	
			DE	69224262		05-03-1998	
			DE	69224262		14-05-1998	
			DE	69229751		09-09-1999	
			DE	69229751	-	02-12-1999	
			DE	69231786		17-05-2001	
			DE	69231786		02-08-2001	
			DE	540290		05-06-1997	
			DE	734699		05-06-1997	
			EP	1068842		17-01-2001	
			EP	0540290		05-05-1993	
			EP	0734699		02-10-1996	
			EP	0807424		19-11-1997	
			JP	2645203		25-08-1997	
			JP	6181993		05-07-1994	
			US	6066168		23-05-2000	
			US	6066167		23-05-2000	
			US	6056776	• -	02-05-2000	
			US		A	06-06-1995	
			US	5514154		07-05-1996	
			UŞ	5603721		18-02-1997	
			US	6309412		30-10-2001	
			US	6432133		13-08-2002	
			US	5728158		17-03-1998	
			US	5735893		07-04-1998	
			US	2001037146	_	01-11-2001	
			US	5766238		16-06-1998	
			US	2001037147	ΑI	01-11-2001	

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82